



NEW!

**Now Including
Series DP7000**


Dual Pedestal Reels



DP7850 OLP
Patent Pending



82100 OLP

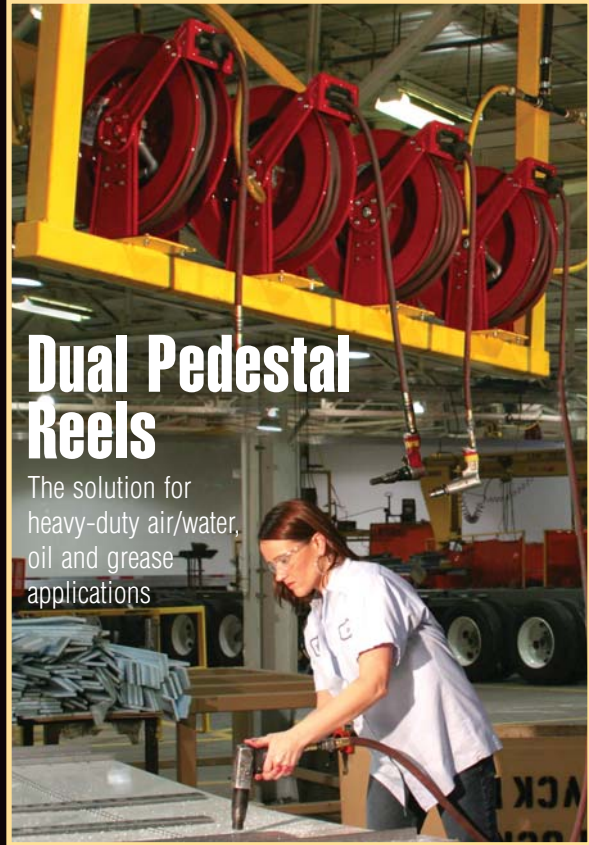

Dual Pedestal Reels

The solution for heavy-duty air/water, oil and grease applications

Wabash National Corporation, Lafayette, IN



Wind Things Up With Reelcraft™

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

www.reelcraft.com

Dual Pedestal Air/Water/Oil/Grease

Series DP7000 - 1/4", 3/8" & 1/2" I.D.

A breakthrough in dual base design has allowed Reelcraft to offer the new DP7000 Series. The patented two piece formed base provides the stability of a dual base. The unique and extremely compact design requires 1/3 less space. Independent testing has proven these reels to stand up to heavy vibration, making them ideal for truck mounted applications. The reel accommodates 50' of hose and features our standard baked on powder coat finish.

NEW!



DP7850 OLP
Patent Pending

✓ **Versatility**

Guide arm adjusts to seven different positions and requires few tools.

✓ **Ease of Operation**

Latch pawl is mounted on the guide arm to prevent latch out at full extension. High impact, nylon filled guide rollers make retraction and pay out nearly effortless.

✓ **Low Maintenance**

A permanent oil impregnated bronze bushing and stainless steel torsion spring are incorporated to insure that, through frequent use, these reels require minimal maintenance.

✓ **Lightweight**

Latch pawl, cam, and hubs are die-cast aluminum to eliminate excessive weight and for superior strength.

✓ **Corrosion Resistance**

An O-Ring seals the spring case. Steel parts are powder coated to provide excellent protection against weathering.

✓ **Strength & Stability**

Dual base and guide arms are stamped from heavy gauge industrial steel and engineered gussets throughout make these reels strong and vibration resistant.

**Meets or Exceeds Military
Vibration for Truck Transport test.**
MIL-STD-810F
500,000 mile equivalent

DIMENSIONS		
	DP7400 DP7600	DP7800
	in / mm	in / mm
A	4 102	5 127
B	8 204	9 229

MODELS WITH HOSE			HOSE CAPACITY						MODELS WITHOUT HOSE			
MODEL	WEIGHT	PRESSURE	HOSE I.D.		HOSE O.D.		(M)NPTF OUTLET	(F)NPTF INLET	LENGTH	MODEL	WEIGHT	PRESSURE
	lbs / kg	psi / bar	in / mm	in / mm	in / mm	in / mm	in	in	ft / m		lbs / kg	psi / bar
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150°F (65° C)												
DP7450 OLP	46 21	300 21	1/4 6	.500 13	1/4	1/2	50 15	DP7400 OLP	42 19	500 35		
DP7650 OLP	47 22	300 21	3/8 10	.688 18	1/4	1/2	50 15	DP7600 OLP	42 19	500 35		
DP7850 OLP	50 23	300 21	1/2 13	.844 22	3/8	1/2	50 15	DP7800 OLP	42 19	500 35		
MEDIUM PRESSURE OIL REELS Maximum Temperature 210° F (99° C)												
DP7650 OMP	55 25	2250 158	3/8 10	.690 18	3/8	1/2	50 15	DP7600 OMP	45 21	3000 207		
DP7850 OMP	57 26	2000 141	1/2 13	.815 21	1/2	1/2	50 15	DP7800 OMP	43 20	3000 207		
HIGH PRESSURE GREASE REELS Maximum Temperature 210° F (99° C)												
DP7450 OHP	57 26	5000 345	1/4 6	.590 17	1/4	1/2	50 15	DP7400 OHP	45 21	5000 345		
DP7650 OHP	60 27	4000 276	3/8 10	.750 19	1/4	1/2	50 15	DP7600 OHP	45 21	5000 345		

North America: 800-444-3134

Europe: +44 (0) 1536 406999

Asia: +63 (45) 625-6624

Latin America: 260-489-1685

www.reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse
 Indiana & California
Warehouses

California Warehouse
 Canadian Warehouse

DUAL PEDESTAL REEL

Series 80000 & D80000

Dual Pedestal Air/Water/Oil/ Grease/Fuel/Twin Welding

Series 80,000 - 1/4", 3/8", 1/2", 3/4" & 1" I.D.


An already field proven reel, the Series 80,000 reels incorporate the most current design and manufacturing techniques to guarantee long life and trouble-free performance. All-steel construction and baked-on powder coat finish combine to produce a rugged corrosion resistant product suitable for a wide variety of heavy duty applications.

FEATURES

- Hose anti-latch out feature ensures hose retracts every time.
- Guide arm is field adjustable for wall, ceiling, or truck mounting positions.
- Dual pedestal base and guide arm design are structurally reinforced with gussets throughout.
- Five-in-one heat treated aluminum casting incorporates main shaft, ratchet, spring arbor, and inlet/outlet plumbing into one piece.
- Containerized spring assembly provides safe and easy handling during maintenance.
- Two sealed ball bearings assure smooth rotation of main shaft.



82100 OLP

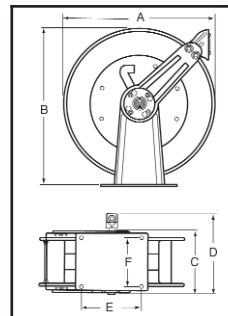

DIMENSIONS

	D80000		80000	
	hose	in / mm	in / mm	
A	24	610	24	610
B	25 3/8	645	25 3/8	645
C	11 3/8	289	8 5/16	211
D	3/4"	14 1/2	362	10 1/2 267
	1"	15 1/2	387	
E	10 1/2	267	10	254
F	7 7/8	199	6	152

Inlet is 1/2" or 3/4" NPTF (F) or 3/4" BSPT. Reel outlet is 1/2" or 3/4" NPTF (F) or 3/4" BSPT. Four 1/2" (12.7mm) diameter mounting holes

MODELS WITH HOSE			HOSE CAPACITY					MODELS WITHOUT HOSE		
MODEL	WEIGHT	PRESSURE	HOSE I.D.	HOSE O.D.	(M)NPTF OUTLET	(F)NPTF INLET	LENGTH	MODEL	WEIGHT	PRESSURE
	lbs / kg	psi / bar							in / mm	in / mm
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150°F (65° C)										
81100 OLP	92 42	300 21	3/8 10	.688 18	3/8	1/2	100 31	81000 OLP	77 35	500 35
82075 OLP	95 43	300 21	1/2 13	.845 22	1/2	1/2	75 23	82000 OLP	82 37	500 35
82100 OLP	101 46	300 21	1/2 13	.845 22	1/2	1/2	100 31	82000 OLP	82 37	500 35
83050 OLP	88 40	250 17	3/4 19	1.188 31	3/4	3/4	50 15	83000 OLP	74 34	500 35
D83075 OLP	112 51	250 17	3/4 19	1.188 31	3/4	3/4	75 23	D83000 OLP	89 40	500 35
D84050 OLP	110 50	250 17	1 25	1.500 38	3/4	1	50 15	D84000 OLP	77 35	500 35
LOW PRESSURE FUEL REELS Maximum Temperature 150°F (65° C)										
†F83050 OLP	89 41	50 3.5	3/4 19	1.188 31	3/4	3/4	50 15	F83000 OLP	74 34	500 35
MEDIUM PRESSURE OIL REELS Maximum Temperature 210° F (99° C)										
82075 OMP	101 45	1500 103	1/2 13	.815 21	1/2	1/2	75 23	82000 OMP	79 35	1500 103
83050 OMP	96 43	1250 86	3/4 19	1.188 31	3/4	3/4	50 15	83000 OMP	77 35	1500 103
HIGH PRESSURE GREASE REELS Maximum Temperature 210° F (99° C)										
81075 OHP	88 39	4000 275	3/8 10	.640 16	3/8	1/2	75 23	81000 OHP	92 42	5000 345
81100 OHP	127 58	4000 275	3/8 10	.640 16	3/8	1/2	100 31	81000 OHP	92 42	5000 345
WELDING GAS (T-GRADE) REELS										
TW84100 OLPT*	105 48	200 14	1/4 6	.530 14	See Below		100 31	TW84000 OLPT	80 36	200 14
TW86075 OLPT*	99 45	200 14	3/8 10	.625 16	See Below		75 23	TW86000 OLPT	86 39	200 14

†UL330 and ULC approved fuel hose. 250 psi (17 bar) minimum burst. *Designates "T" grade twin hose suitable for Oxygen/Acetylene, Mapp, Propane Gas, Natural Gas, and Fuel Gases. Acetylene/fuel gas (red) inlet 1/4" FPT / Oxygen (green) inlet 1/4" FPT. For other questions, specifications or applications please consult manufacturer.

North America: **800-444-3134** Asia: **+63 (45) 625-6624**
 Europe: **+44 (0) 1536 406999** Latin America: **260-489-1685**
www.reelcraft.com

REELCRAFT
 Wind Things Up With Reelcraft™

Work Smarter

North America Corporate Headquarters

One Reelcraft Center • P.O. Box 248
Columbia City, IN 46725-0248
Ph: 800-444-3134 • Fax: 800-444-4587
Ph: 260-248-8188 • Fax: 260-248-2605
e-mail: reelcraft@reelcraft.com
www.reelcraft.com

Latin America and the Middle East

Thompson International, Inc.
P.O. Box 12958
Ft. Wayne, IN 46866
Ph: 260-489-1685
Fax: 260-489-0203
e-mail: info@t-i-i.com
www.reelcraft.com/latinamerica

China

Reelcraft Changzhou Co., Ltd.
Building C, No. 229 HeHai West Road
Changzhou, Jiangsu, China 213022
Ph: (519) 8512 2391 ext. 8002
Fax: (519) 8512 9309
email: rco@reelcraftchina.com
www.reelcraft.com/china

Europe

Unit 17 • Cronin Courtyard
Weldon South Industrial Estate
Corby • Northamptonshire • NN18 8AG
United Kingdom
Ph: +44 (0) 1536 406999
Fax: +44 (0) 1536 406777
e-mail: europe@reelcraft.com
www.reelcraft.com/europe

Canada


1705 Argentia Rd. Unit #7
Mississauga, ON L5N 3A9
Ph: 800-444-3134 • Fax: 800-444-4587
e-mail: reelcraft@reelcraft.com

Asia Pacific

P.O. Box 53776
Clark Freeport Zone
Philippines 2023
Ph: +63 (45) 625-6624
Fax: +63 (45) 321-0643
e-mail: rap@comclark.com
www.reelcraft.com/asia

Australia

PO Box 6463 BC, Blacktown
NSW 2148, Australia
Ph: +61 (2) 9621 8988
Fax: +61 (2) 9621 7688
e-mail: sales@recoila.com



917-1097



MCAT-001



737-1194



1123-802



1122-802



Wind Things Up With Reelcraft™

Form # DP-407 0804

reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996